


Variapro







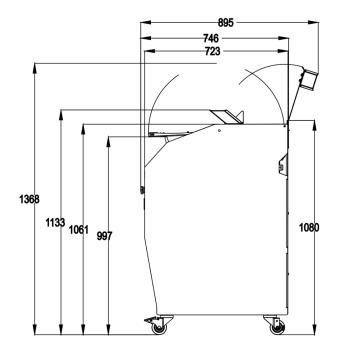



SPECIFICATIONS

Size of entry channel (L x W x H) in cm	37 x 34 x 16
Slice thickness in mm	Can be set from 5 to 25mm
Power supply	230V single-phase
Motor power in kW	0.75
Net weight (in kg)	230
Cleaning position	
Manual claw	
Blade type	Teflon-coated
GS certification	



Options (Additional cost)

Clips box, Bag holder, Front bagger stand, Sourdough bread holder, Slice thickness display

MAIN STRENGTHS



Smooth and quiet for all breads

New engine generation designed for maximum precision on a wide range of breads, without lubrication. Soft start and stop function.





Teflon coated circular blade

Planetary blade drive

Automatic grip (option)

Developed to cut through a large variety of breads; from soft to dense, with a hard crust, and even sticky breads.

Fluid blade movement, avoids back-and-forth shakes.

Robust solution for long-term mechanical reliability.

Just place the bread and the machine does the rest



Adjustable speed up to 240 slices/ minute

In order to reach the fastest possible speed for each bread type.




Touch screen interface

Manual grip

to minimize last slice width.

Clear and simple interface, for an immediate and intuitive use.

For all kinds of breads, including sharp ends. Allows





while you continue to serve your customers.

Rotating spade, above cutting chamber, to optimize ergonomics and hygiene. Two standard (left and right) bagging spade positions. Or non-rotating front position (option).

Multi-positions adjustable bagging spade





Upper cover

Prevents objects placed on the machine (e.g. bags) to be pushed inadvertently behind the machine when opening the front cover. Rotates for easy cleaning.



Easy to access power switch

Accessible from the front of the machine, but not visible; avoids operations by a non-authorized person.



Maximum safety

Highest safety standards, for machine use by consumers and staff. The blade cannot run when the machine is not 100% locked.



Easy & fast cleaning

Internal architecture designed to channel bread crumbs to an easily accessible crumb tray. Flat surfaces (without recess around).



Anti-pinch design

Users cannot inadvertently pinch their fingers in the front cover sliders.



Bread slicer GS certified by TÜV

The GS certification (Geprüfte Sicherheit - "Safety Tested" in English) guarantees the safety of products and the protection of users' health. This highest level of certification ensures an absolute degree of safety for users.



BPA-free paint

100% BPA-free satin paint (Bisphenol A): safer for you, gentler on the planet. Its low-temperature curing process significantly reduces energy consumption. Available in three solid colours: white, black or grey.

